

The *M* Class

Moffett *M55* 4-Way

Mproved...



- ...Ergonomics
- ...Performance
- ...Maintenance
- ...Styling



In less than a minute the Moffett truck mounted forklift can mount or dismount a truck or trailer and be ready for work.

Moffett **M55** 4-Way

M55 4-Way

	TYPE	4-Way
1	CAPACITY @ 24" LOAD CENTER	5500 lbs
2	KUBOTA DIESEL ENGINE	60 hp
3	MAXIMUM REVS	3000 rpm
4	ELECTRICAL SYSTEM	12 Volt
5	DRIVE WHEELS	3
6	STEERING	Hydrostatic
7	FRONT TIRE TYPE (TREAD*) REAR TIRE TYPE (TREAD*)	31.5x13-16.5, 10-PLY (S.F.) 31x15.5-15, 8-PLY (T.G.)
8	TIRE OUTSIDE DIAMETER	31"
9	TIRE WIDTH	Front 13"/Rear 15 1/2"
10	MAXIMUM SPEED	7 mph
11	MAXIMUM GRADABILITY (4-WAY)	30% (15%)
12	TURNING RADIUS	78"
13	UNLADEN WEIGHT	7040 lbs
13a	UNLADEN WEIGHT (OPTIONAL)	7180 lbs
14	WORKING PRESSURE FOR ATTACHMENTS	2500 psi
15	TILT OF MAST (FORWARD/BACK)	10°/8°
16	SIDESHIFT	5"
17	FORK SECTION	48x6x2"
18	MAST CARRIAGE TRAVEL (EXT)	31"
19	COUNTERWEIGHTS	Standard
A	HEIGHT TO TOP OF CANOPY	101"
B	FORK CARRIAGE WIDTH (CLASS)	48 1/4" (II)
C	FRAME OPENING	57 3/4"
D (D4)	OVERALL WIDTH (4-WAY MODE)	101 1/4" (108")
E	MINIMUM OVERHANG (Rear Wheel Turned 180°)	60"
F	WHEEL BASE	65 1/2"
G	C. OF G. FROM FORK FACE	17"
H1	LIFT HEIGHT	120"
H2	MAST HEIGHT COLLAPSED	95 1/2"
H3	MAST HEIGHT RAISED	155 1/2"
H1a	LIFT HEIGHT	144"
H2a	MAST HEIGHT COLLAPSED	107 1/2"
H3a	MAST HEIGHT RAISED	179 1/2"
J	GROUND CLEARANCE	8 1/2"
K	FACE OF FORK TO CENTER OF FRONT TIRE	15"
L	ANSI STANDARD	B56.6

The above specifications are not binding upon the manufacturer and may be changed without prior notice.
Weights may vary depending on tire and/or fork option. Weights are exclusive of (do not include) forks and attachments.


01/2006



more than a truck mounted forklift

Hiab, Inc.

12233 Williams Road
Perrysburg, Ohio 43551
Tel: 419.482.6000 Fax: 419.482.6001
Email: us.sales@hiab.com
www.hiabus.com

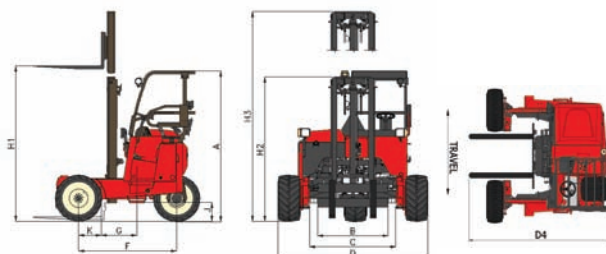

*T.G. = Tractor Grip | R.T. = Rough Terrain | S.S. = Skid Steer | S.F. = Super Float