VOLVO



Volvo Articulated Haulers
Imperial: 27.5-32 ton(us) / 55,116-63,934lb / 315-355HP
Metric: 25-29t / 25,000-29,000kg / 235-265kW

A25G, A30G

Volvo Construction Equipment



Being the first. Keeping the lead.

Since introducing Gravel Charlie, the world's first series manufactured articulated hauler, Volvo has consistently led the way when it comes to pioneering technology which delivers unrivalled levels of sustainable productivity and performance.

Today we offer the most comprehensive range of articulated haulers in the industry, with common technology throughout, ensuring optimum results whatever size class you operate. Combined with a range of complementary services and solutions, you can count on Volvo Articulated Haulers to deliver the lowest possible cost per tonne.

1966
DR631 "Gravel Charlie"
The world's first series manufactured articulated hauler

1967
DR 860
3-axle machine with unique bogie concept

1979
5350
Featuring fully automatic transmission, unique suspension system and class leading cab with low noise level

1993
A25C
The first articulated hauler with low emission engine as standard

1995
A40
Product range from 20t to 40t

2000
D-series
Built with a focus on the operator



As part of our enduring focus on environmental care we are committed to Science Based Targets to achieve net-zero value chain emissions by 2040. From product planning through to end-of-life, our focus continues to be on minimizing our global footprint and driving transformation in our industry.

▲

Follow our carbon reduction journey

2007

E-series and A40 FS
The world's first full suspension articulated hauler

2011

F-series
Further improving ease of operation and environmental care

2014

G-series
Wet, cooled brakes on all models

2016

A60H
The world's largest articulated hauler

TODAY

A 25t to 55t
product offering, complete with a range of services

Keep on moving

Effective maintenance can have a big influence on your total cost of ownership. Volvo Articulated Haulers are designed to be easy to service, helping you to maximize your uptime and keep maintenance costs to a minimum.

Reduce oil volume by half

When measured over the lifetime of the machine, Volvo Articulated Haulers require less than half the fluid volume compared to competition, benefitting both the environment and your operating costs.



1,000hr engine service intervals

Volvo Engine Oil and High Performance Filters offer 1000 hour engine service intervals. The result is 50% less oil and filters – reducing maintenance requirements as well as your environmental impact.



Easy to service

Servicing your machine is quick and easy thanks to industry leading service access and essential maintenance points accessible from the ground. The front grill swings down, opening a service platform with anti-slip steps and the electric hood opens to 90 degrees, allowing full access to the engine compartment.



Service alerts

Fluid levels are constantly monitored with timely service alerts displayed on the dashboard, helping you stay on top of your maintenance requirements.



Reduce your maintenance costs with Volvo Articulated Haulers.



NO DAILY OR WEEKLY GREASING

With Volvo Articulated Haulers greasing is only required every 250 hours – the best in the industry – delivering maximum uptime.

Haul Assist

Gain access to a set of tools designed to help you get the most out of your Volvo Articulated Hauler and boost your profitability.

Proactive tire management

Optimize tire life with the support of the Tire Pressure Monitoring System, which allows the operator to monitor tire pressure and temperature from the comfort of the cab.



A complete site overview

Monitor the whereabouts of all your machines, vehicles and visitors in real-time with Map, a connected tool which provides accurate positioning to help monitor on-site traffic and navigate the site more efficiently.



Go into detail

Reports can be generated automatically on a daily and weekly basis, or manually at any time, including the geo-tracking of moved material which is enabled by Map.



Support you can count on

As a fully integrated and factory-fitted Volvo system, all the components, hardware and software of Haul Assist are supported by your Volvo dealer to keep your operation running smoothly. What's more, you will benefit from over-the-air updates, easy upgrades and remote support.





The perfect Assist-ant to help get the most of your Volvo Articulated Haulers.

TAKE CONTROL OF YOUR PRODUCTIVITY

On-Board Weighing provides real-time payload information which can help to eliminate carry-back and overloading; the result is peak productivity, reduced fuel consumption and less machine wear.

Move more for less

Boost your profits with Volvo Articulated Haulers, designed to deliver high productivity at the lowest cost per tonne.

Optimized payload

The machine is optimized for efficiency featuring high payload capabilities. Its smart design allows for more capacity while reducing fuel consumption so you can move more for less.



Simply the best

The machine delivers unbeatable off-road performance in its class with features including proven Volvo drivetrain, automatic drive combinations including 100% differential locks, all-terrain bogie and hydro-mechanical steering.



Smooth descent

Make your daily job easier with downhill speed control. The function automatically maintains a constant speed when operating on downward gradients and is the perfect alternative to the retarder pedal for a more efficient and comfortable shift.



Volvo dynamic drive

Dynamic and predictive gear selection adapts to operating conditions, for improved comfort and fuel efficiency.





Volvo Articulated Haulers deliver the highest profitability.

INTELLIGENT EFFICIENCY

Experience superb fuel efficiency without compromising on power and performance thanks to the world-renowned Volvo drivetrain, including Terrain Memory. The intelligent function identifies and remembers slippery road segments to ensure optimized traction control – the result is excellent off-road mobility.

Control in comfort

Featuring superior comfort, ease of operation and safety, the industry-leading cab appeals to operators and helps maintain productivity all day, every day.

Total control

Volvo Articulated Haulers are packed with features to help operators get the most from the machine. Intelligent functions such as cruise control, downhill speed control and hill assist help control the hauler with ease and efficiency, for enhanced safety and productivity in all conditions.



Ease of operation

The ergonomic, comfortable and easy-to-understand controls are designed to suit all operators. Additional automatic functions such as OptiShift – which enables fast and smooth directional changes – further enhance ease of operation.



Operator comfort

Feel comfortable and spend more time in the Volvo Articulated Haulers. The centrally positioned operator, superior steering, excellent suspension, low noise levels, climate control, space and visibility reduce operator fatigue for more effective operations.



Safety first

Whether its operators, trainers, technicians or site workers – safety on site is of fundamental importance. In the Volvo Articulated Haulers superior visibility and efficient lighting combine with features such as the brake test and dump support, helping to keep everyone working around the machine safe.





Volvo Articulated Haulers are the operator's number one choice.

OPERATOR'S CHOICE

A happy operator is a more productive operator and when many other machines are onsite, most operators prefer the Volvo. Even in the most adverse conditions, its comfortable cab and ease of operation keep operators alert and performing their best.

Hauling heavy profits

Only from Volvo

- Industry-leading Volvo engine and driveline: high performance, high fuel efficiency
- Terrain Memory function: optimized engagement of the traction control for excellent off-road mobility
- Volvo dynamic drive
- Automatic drive combinations including 100% differential locks, all-terrain bogie and hydromechanical steering
- OptiShift: fast and smooth directional changes

The operator's choice

- Ease of operation: ergonomic and easy-to-understand controls
- Centrally positioned operator for best-in-class visibility
- Cruise control, hill assist, dump support system, load and dump brake
- The downhill speed control function automatically maintains a constant speed when operating on downward gradients
- Built-in brake test: schedule and perform a stationary brake test, guided by the machine display



Solutions for you

- Easy machine monitoring: CareTrack, ActiveCare Direct
- Lifetime Frame and Structure Warranty
- 24hr parts delivery guarantee
- Genuine Volvo Parts
- Volvo Site Simulation: get recommendations on the best fleet configuration and site set-up
- Operator Training Program: unlock the full potential of your machine
- Uptime Services: control your maintenance costs

Haul Assist

- On-Board Weighing: real-time payload monitoring
- Tire Pressure Monitoring System
- Map: real-time positioning of on-site traffic
- Productivity Reports, including the geo-tracking of moved material
- Over-the-air updates, easy upgrades, remote support

Service and maintenance

- 250-hour greasing interval
- Half the fluid volume compared to the competition
- 1,000hr engine service intervals
- Service reminders and fluid level monitoring
- Industry-leading service access and ground-accessible service points



Configured for success

Ensuring your fleet is configured in the correct way can yield huge benefits to your operation including more productivity, enhanced performance and less costs.

Here are some tips to help tailor your new Volvo Articulated Hauler according to the application, site conditions and type of transported material, as well as matching to the appropriate loading unit. For more detailed information, talk to your Volvo dealer!

Body options

Question	Answer	Solution
Dealing with height restrictions? Operating in restricted height conditions e.g. silos or underground	No	Select standard body
	Yes	Select low profile body
Hauling abrasive material? Granite, silicate etc	No	*Go to next question*
	Yes	Select wear plates / rock liners for extended service life
What material density? Gravel is ~1.4 sh tn/yd³	> 1.3 sh tn/yd³ (gravel, blasted rock)	*Go to next question*
	1.0 - 1.3 sh tn/yd³ (dry earth, shale)	Select side extensions to increase body volume
	< 0.85 sh tn/yd³ (coal, fly ash etc)	Select light material kit to increase body volume
Front spill protection needed? Getting loaded by large excavator	No	*Go to next question*
	Yes	Select front spillguard
Extra load retention needed? Risk of dropping material e.g. when climbing steep inclines	No	*Go to next question*
	Yes, but not hauling boulders	Select tailgate – overhung type – to reduce spillage
	Yes, hauling boulders	Select tailgate – underhung type – to reduce spillage
Hauling sticky material? Risk of carry-back	No	*Go to next question*
	Yes	Select body exhaust heating

Exceeding gross machine weight is not permitted.
Payload should be reduced by the weight of the optional equipment.

Tires

Question	Answer	Solution
Operating on abrasive haulroad? Risk of tire cuts or extensive wear	No	E3 tires are optimized for soft ground, offering the best traction and high average speed
	Yes	Select E4 tires for the best cut resistance, comfort and tread life
Extra flotation needed? Risk of sinkage in soft ground	No	Select standard profile tires
	Yes	Select low profile tires, featuring lower ground pressure for improved flotation, stability and comfort



Optimal pass-matching

Volvo Excavator	EC250	EC300	EC350	EC380	EC480	EC530	EC550	EC750
	Number of passes							
A25G	10	9	8	7	5	4	4	3
A30G	12	10	9	8	6	5	4	3

- Excavator overcapacity, 3 buckets or below
- Well matched, 4-6 buckets (≈ 90 seconds loading time)
- Excavator undercapacity, 7 buckets or more
- Excavator undersized for optimum match

Volvo Wheel Loader	L90	L110	L120	L150	L180	L220	L260
	Number of passes						
A25G	5	5	4	3	3	3	2
A30G	6	5	5	4	4	3	3

- Loader overcapacity, 2 buckets or below
- Well matched, 2-3 buckets (≈ 90 seconds loading time)
- Loader undercapacity, 4 buckets or more
- Loader undersized for optimum match. Reach might also be an issue



Hauler chassis solutions

With Special Application Solutions and different chassis options you can tailor Volvo Articulated Haulers to your specific needs.



Volvo A25G, A30G in detail

Engine

V-ACT, 11 liter,6-cylinder straight VGT (Variable Geometry Turbocharged) diesel engine with 4 valves per cylinder, overhead camshaft. The Fuel system have a common rail with electronically controlled of 3 Pce of pumping injectors and 3 Pce of non-pumping injectors. It has wet replaceable cylinder liners and replaceable valve guides and valve seats. The engine has cooled EGR (Exhaust Gas Recirculation) and exhaust after treatment with EAT-Muffler (Exhaust After treatment) including DOC (Diesel Oxidation Catalyst), DPF (Diesel Particulate Filter) and SCR (Selective Catalytic Reduction) with an electronically controlled UDS (Urea Dosing System).
After treatment system features passive DPF regeneration with an AHI (After treatment Hydro carbon Injection) device as back up.

		A25G	A30G
Engine model	Volvo	D11M	D11M
Max power - SAE J1995 Gross	kW (hp)	235 (315)	265 (355)
at engine speed	r/min (r/s)	2,100 (35)	2,000 (33.3)
Flywheel power - ISO 9249, SAE J1349 Net	kW (hp)	234 (314)	264 (354)
at engine speed	r/min (r/s)	2,100 (35)	2,000 (33.3)
Max torque - SAE J1995 Gross	Nm (ft lbf)	2,040 (1,505)	2,040 (1,505)
Max torque - ISO 9249, SAE J1349 Net	Nm (ft lbf)	2,030 (1,497)	2,030 (1,497)
at engine speed	r/min (r/s)	1,100 (18.3)	1,200 (20)
Displacement	l (in^3)	10.8 (659)	10.8 (659)

Electrical System

All cables, sockets and pins are identified. Cables are enclosed in plastic conduits and secured to main frame. Halogen lights. Prewired for options. Connectors meet IP67 standard for water-proofing as necessary.

		A25G	A30G
Voltage	V	24	24
Battery	V	2x12	2x12
Battery capacity	Ah	2x170	2x170
Alternator	kW/A	3.396/120	3.396/120
Starter motor	kW	9	9

Drivetrain

Torque converter with built-in lock-up function.
Transmission: Fully automatic Volvo PowerTronic planetary transmission with six forward gears and two reverse gears. The transmission has the ability to skip gears for fast and accurate gear selection.
Dropbox: Volvo-developed, in-line design with high ground clearance and 100% longitudinal "dog clutch" type differential lock.
Axles: Heavy duty, purpose built Volvo design with fully floating axle shafts, planetary type hub reductions and 100% dog clutch type diff-lock.
Automatic traction control system (ATC).

		A25G	A30G
Torque converter		2.37:1	2.37:1
Transmission	Volvo	PT 2116	PT 2116
Dropbox	Volvo	IL1 ATC	IL1 ATC
Axles	Volvo	AHW56	AHW64

Brake system

Fully hydraulic, wet multiple disc brakes with enclosed, forced oil-cooled multiple discs on all wheels. Two circuit brake system. Complies with ISO 3450 at total machine weight.
Circuit division: One circuit for front axle and one for bogie axles.
Parking brake: Spring-applied disc brake acting on the trailer unit propeller shaft. When the parking brake is applied , the longitudinal differential locked.
Retarder: Service brake retarder function and Volvo Engine Brake (VEB).

Steering System

Hydro-mechanical articulated steering, self compensating design.
Two double-acting steering cylinders.
Steering angle: 3,4 steering wheel turns lock-to-lock, ±45°.
Steering system, including secondary steering fulfi lls ISO 5010.

Chassis

Frames: box type, heavy duty. High strength steel, robot welded.
Rotating hitch: 100% maintenance free, fully sealed, with permanently greased tapered roller bearings.

Cab

Mounted on rubber pads. Ergonomically designed. Easy entry and exit. Wide angle forward view.
Operator centerally positioned above the front axle. Adjustable operators seat with retractable seat belt.
Tilt/telescopic steering wheel. Ergonomically positioned controls. Filtered air. Climate control system.
Operator communication system: Contronics.
Large color display, user-friendly and easy-to-understand information, all vital machine functions are constantly monitored.
Instructor seat with seat belt.
Safety: ROPS/FOPS standards approved according to ISO3471, SAE J1040 / ISO3449, SAE J231.

		A25G	A30G
Sound level in cab (ISO 6396) - L_{pA}	dB	72	72
External sound level (ISO 6395) - L_{WA}	dB	110	111

Internal sound level with sound kit: 70 dB(A)
External sound level with sound kit: 108 dB(A)



Hydraulic system

Pumps: Four variable displacement piston pumps driven by the flywheel PTO.
Two load-sensing used for steering and tipping and two electrical controlled used for fan, brake cooling and brake power supply.
One ground-dependent piston pump for secondary steering mounted on the dropbox.
Two return oil filters with magnetic cores provide effective oil filtration.

		A25G	A30G
System max working pressure	MPa (psi)	25 (3,626)	25 (3,626)

Dumping System

Patented Load and Dump Brake.
Dumping Cylinders: two single stage double acting cylinders.

		A25G	A30G
Tipping angle	°	74	70
Tipping time with load	s	12	12
Lowering time	s	10	10

Body

		A25G	A30G
Plate thickness			
Front	mm (in)	6 (0.24)	6 (0.24)
Sides	mm (in)	10 (0.39)	10 (0.39)
Bottom	mm (in)	14 (0.55)	14 (0.55)
Chute	mm (in)	14 (0.55)	14 (0.55)
Material			
Yield strength	N/mm² (psi)	1,150 (166,793)	1,150 (166,793)
Tensile strength	N/mm² (psi)	1,350 (195,801)	1,350 (195,801)

Load Capacity

		A25G	A30G
Standard Body			
Load capacity	kg (sh tn)	25,000 (27.56)	29,000 (32)
Body, struck	m³ (yd³)	12.1 (15.8)	13.9 (18.2)
Body, heaped 2:1	m³ (yd³)	15.3 (20)	17.8 (23.3)
With overhung tailgate			
Body, struck	m³ (yd³)	12.4 (16.2)	14.2 (18.6)
Body, heaped 2:1	m³ (yd³)	15.9 (20.8)	18.4 (24.1)

Suspension

Front suspension: Gas-hydraulic struts. Soft and progressive.
Independent wheel movement via a 3-point mounting system.



Specifications

REFILL CAPACITIES

			A25G		A30G	
Crankcase	l	gal	35	9.2	35	9.2
Fuel tank	l	gal	380	100.4	380	100.4
Cooling system	l	gal	48	12.7	48	12.7
Brake cooling system	l	gal	35	9.2	35	9.2
Transmission	l	gal	41	10.8	41	10.8
Dropbox	l	gal	9	2.4	9	2.4
Axles, front/bogie	l	gal	30/61	7.9/16.1	31/63	8.2/16.6
Hydraulic tank	l	gal	137	36.2	137	36.2
DEF	l	gal	39	10.3	39	10.3

SPEED

			A25G		A30G	
Forward						
1	km/h	mph	8.3	5.2	8.3	5.2
2	km/h	mph	11.9	7.4	11.9	7.4
3	km/h	mph	21.1	13.1	21.1	13.1
4	km/h	mph	30.3	18.8	30.3	18.8
5	km/h	mph	38.4	23.9	38.4	23.9
6	km/h	mph	52.7	32.7	52.7	32.7
Reverse						
1	km/h	mph	7.7	4.8	7.7	4.8
2	km/h	mph	13.7	8.5	13.7	8.5

OPERATING WEIGHT UNLOADED

			A25G		A30G	
Tires			23.5R25*		750/65R25**	
Front	kg	lb	12,800	28,219	12,900	28,440
Rear	kg	lb	9,900	21,219	10,700	23,589
Total	kg	lb	22,700	50,045	23,600	52,029
Payload	kg	lb	25,000	55,116	29,000	63,934

Operating weight includes all fluids and operator

*) A25G with tires 750/65R25, add 200 kg (440 lb)/axle

**) A30G with tires 23.5R25, decrease 200 kg (440 lb)/axle

TOTAL WEIGHT


			A25G		A30G	
Tires			23.5R25*		750/65R25**	
Front	kg	lb	14,950	32,959	15,600	35,613
Rear	kg	lb	32,750	72,201	36,900	81,351
Total	kg	lb	47,700	105,160	52,600	115,963

*) A25G with tires 750/65R25, add 200 kg (440 lb)/axle

**) A30G with tires 23.5R25, decrease 200 kg (440 lb)/axle

GROUND PRESSURE

			A25G		A30G		A25G		A30G	
Tires			**23.5R25**		**750/65R25**		**750/65R25**		**23.5R25**	
Unloaded										
Front	kPa	psi	130	18.9	108	15.7	108	15.7	131	19
Rear	kPa	psi	49	7.1	43	6.2	42	6.1	50	7.3
Loaded										
Front	kPa	psi	157	22.8	130	18.9	125	18.1	157	22.8
Rear	kPa	psi	166	24.1	152	22	137	19.9	184	26.7

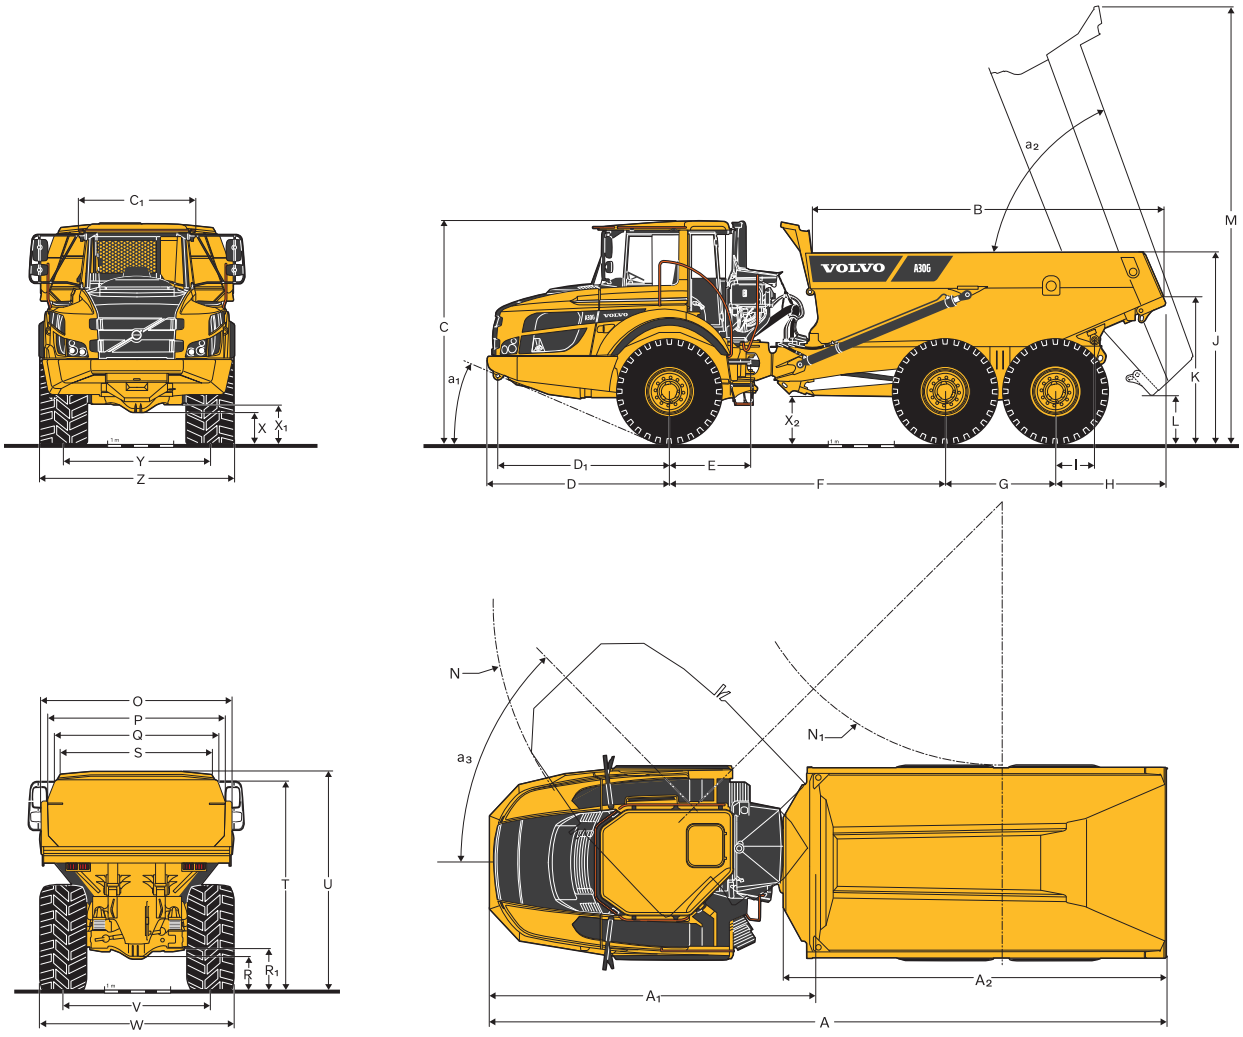

DIMENSIONS

Pos	Unit		A25G		A30G	
A	mm	ft in	10,218	33'6"	10,296	33'9"
A_1	mm	ft in	4,954	16'3"	4,954	16'3"
A_2	mm	ft in	5,736	18'10"	5,811	19'1"
B	mm	ft in	5,162	16'11"	5,384	17'8"
C	mm	ft in	3,356	11'0"	3,366	11'1"
C_1	mm	ft in	1,772	5'10"	1,772	5'10"
D	mm	ft in	2,762	9'1"	2,762	9'1"
D_1	mm	ft in	2,607	8'7"	2,607	8'7"
E	mm	ft in	1,209	4'	1,209	4'
F	mm	ft in	4,175	13'8"	4,175	13'8"
G	mm	ft in	1,670	5'6"	1,670	5'6"
H	mm	ft in	1,610	5'3"	1,688	5'6"
I	mm	ft in	609	2'	609	2'
J	mm	ft in	2,791	9'2"	2,866	9'5"
K	mm	ft in	2,103	6'11"	2,183	7'2"
L	mm	ft in	678	2'3"	688	2'3"
M	mm	ft in	6,529	21'5"	6,562	21'6"
N	mm	ft in	8,109	26'7"	8,109	26'7"
N_1	mm	ft in	4,092	13'5"	4,048	13'3"
O	mm	ft in	2,776	9'1"	2,976	9'9"

DIMENSIONS

Pos	Unit		A25G		A30G	
P	mm	ft in	2,490	8'2"	2,690	8'10"
Q	mm	ft in	2,298	7'6"	2,472	8'1"
R	mm	ft in	519	1'8"	524	1'9"
R_1	mm	ft in	633	2'1"	639	2'1"
S	mm	ft in	2,110	6'11"	2,288	7'6"
T	mm	ft in	3,094	10'2"	3,196	10'6"
U	mm	ft in	3,265	10'9"	3,325	10'11"
V	mm	ft in	2,258	7'5"	2,216	7'3"
W	mm	ft in	2,915	9'7"	2,954	9'8"
X	mm	ft in	455	1'6"	466	1'6"
X_1	mm	ft in	581	1'11"	592	1'11"
X_2	mm	ft in	660	2'2"	680	2'3"
Y	mm	ft in	2,258	7'5"	2,216	7'3"
Z	mm	ft in	2,915	9'7"	2,954	9'8"
a_1	°		23.5		23.2	
a_2	°		74		70	
a_3	°		45		45	

A25G: Unloaded machine with 23.5 R25

A30G: Unloaded machine with 750/65R25

Equipment

STANDARD EQUIPMENT

	A25G	A30G
Engine		
Direct injected, electronically controlled, turbocharged, intercooled	•	•
Grouped oil filters	•	•
Preheater for easier cold starts	•	•
VEB (exhaust retarder EPG + compression brake)	•	•
Tires		
23.5R25	•	–
750/65R25	–	•
Drivetrain		
6x4 and 6x6 automatically engaged drive modes	•	•
Dog clutch type 100% diff-locks in all axles	•	•
Full automatic transmission	•	•
Dropbox with longitudinal diff-lock	•	•
Torque converter with automatic lock-up	•	•
Electrical System		
120 A alternator	•	•
Battery disconnect switch	•	•
Extra 24 V socket for lunch cooler	•	•
Lights:	•	•
Back-up light	•	•
Brake lights	•	•
Cab lighting	•	•
Direction indicators	•	•
Headlights	•	•
Instrument lighting	•	•
Parking lights	•	•
Rear lights	•	•
Brake system		
Hill assist	•	•
Load & Dump Brake	•	•
Retarder pedal	•	•
Parking brake on propeller shaft	•	•
Two circuit, fully hydraulic, wet discs on all axles	•	•
Body		
Body prepared for exhaust heating and optional equipment	•	•
Safety		
Anti-slip steps and platforms	•	•
Dump body lock	•	•
Handrails on steps and platforms	•	•
Hazard lights	•	•
Horn	•	•
Protective grill for cab rear window	•	•
Rear-view mirrors	•	•
Retractable 3-inch safety belt	•	•
ROPS/ FOPS - certified cab	•	•
Secondary steering	•	•
Steering joint lock	•	•
Windshield washers	•	•
Windshield wipers with interval function	•	•
Dump support system	•	•

STANDARD EQUIPMENT

	A25G	A30G
Comfort		
ACC control panel	•	•
Ashtray	•	•
Cab heater with filtered fresh air and defroster	•	•
Can holder /storage tray	•	•
Instructor seat with seat belt	•	•
Overhead console for radio	•	•
Sliding window	•	•
Space for lunch cooler	•	•
Storage box	•	•
Sun visor	•	•
Tilt/telescopic steering wheel	•	•
Tinted glass	•	•
Operator information interface		
Gauges:		
Brake pressure	•	•
Fuel	•	•
Speedometer	•	•
Tachometer	•	•
Wet disc brakes cooling oil temperature	•	•
Warning lights grouped and easy to read		
Central warning (3 levels) for all vital functions	•	•
Central positioned information display		
Automatic pre-start checks	•	•
Clock	•	•
Hour meter	•	•
Operational information, easy-to-navigate menu	•	•
Troubleshooting diagnostics	•	•
Exterior		
Front mudguard wideners and rear mudflups	•	•
Service and maintenance		
Electrical engine hood	•	•
Machine Tracking Information System MATRIS	•	•
Service platform integrated in the front grill	•	•
Tool box	•	•

OPTIONAL EQUIPMENT


	A25G	A30G
Engine		
Air filter, heavy duty, EON	•	•
Engine heater, 120 V, USA	•	•
Engine heater, 240 V	•	•
Engine heater, diesel (Eberspächer)	•	•
Engine auto shutdown	•	•
Engine shutdown timer	•	•
External emergency engine stop	•	•
Fuel filter, extra	•	•
High engine idle speed	•	•
Tires		
23.5R25	–	•
750/65R25	•	–

OPTIONAL EQUIPMENT	A25G	A30G
Electrical System		
Headlights, LED	•	•
Warning beacon, LED	•	•
Working lights, halogen	•	•
Working lights, LED	•	•
Entrance light	•	•
Anti-theft system (pin code)	•	•
Rear view camera	•	•
Reverse alarm	•	•
CAN-BUS interface, extra	•	•
Cab		
Noise reduction kit (fulfils 2000/14/EC)	•	•
Anchorage, operator's manual	•	•
Cab heating/ventilation timer	•	•
Cable kit, for cab heater 240 V	•	•
HEPA cab air filter	•	•
Bluetooth radio kit	•	•
Rear view mirrors, adjustable, el.heated	•	•
Seat belt XXL, non-retractable	•	•
Sun blinds, side windows	•	•
Universal key	•	•
Air suspended, heated, fully adjustable seat	•	•
Armrest for operator seat	•	•
Headrest for operator seat	•	•
Low profile cab	•	•

OPTIONAL EQUIPMENT	A25G	A30G
Body		
Body exhaust heating	•	•
Front spillguard, extra	•	•
Side extension, 200 mm / 7.9 in	•	•
Side extension, light material	•	•
Tailgate, overhung, linkage-operated	•	•
Tailgate, overhung, wire-operated	•	•
Tailgate, underhung	•	•
Wear plates, 450 HB	•	•
Underground body	•	•
Safety		
Fire suppression system	•	•
Warning triangle	•	•
First aid kit and fire extinguisher	•	•
Fire extinguisher	•	•
Wheel chocks	•	•
Service and maintenance		
Lube system, standard machine	•	•
Lube system, tailgate	•	•
Lubrication hose, ground level greasing	•	•
Tool kit	•	•
Others		
Siberian kit -40°C	•	•
Arctic oil kit	•	•
CareTrack	•	•
Fast fuelling system	•	•
Jump start connector, NATO -type	•	•
Frame extension	•	•
Bogie extension	•	•
Haul Assist - On-Board Weighing	•	•
Haul Assist - Tire Pressure Monitoring System	•	•

SELECTION OF VOLVO OPTIONAL EQUIPMENT

Fire suppression system

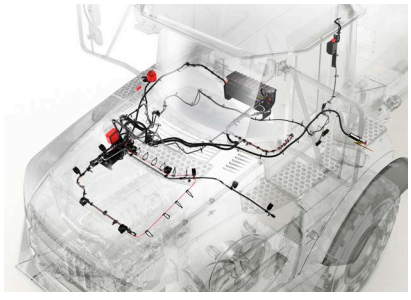


Fast fuelling



Heavy duty air filter




Exhaust body heating

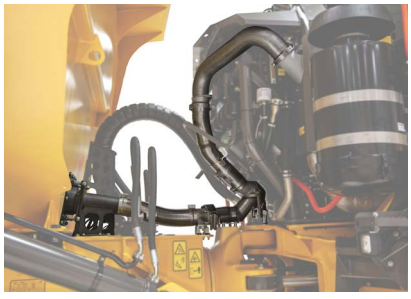

LED lighting



Entrance light

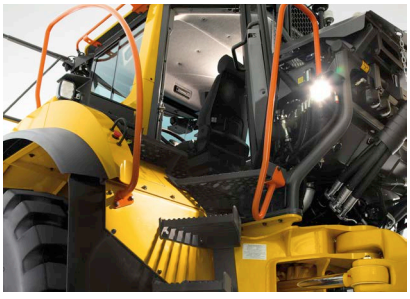

Not all products are available in all markets. Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice.
The illustrations do not necessarily show the standard version of the machine.

Solutions for you

Our industry leading machines are just the start of your relationship with Volvo. As your partner, we have developed an extensive range of additional solutions to help you improve uptime, boost productivity and reduce costs.

Our portfolio of products and services is designed to complement your machine's performance and boost your profitability. Simply put, we offer some of the best guarantees, warranties and technological solutions in the industry today. Below are just some examples. Talk to your dealer to find out and discuss the right fit for you!



Get the most from your machine

While reliable and efficient machines of course play a vital role in reducing costs, enhancing safety and maximizing productivity, it is ultimately the performance of the operator that really makes the difference. We offer a range of training initiatives to help operators unlock the full capability of their Volvo Articulated Hauler.

Connected to Uptime

Maximize machine uptime and reduce repair costs with the CareTrack telematic system. Choose to keep track of your machine yourself or let us take care of it with ActiveCare Direct. Our Volvo Uptime Center will provide 24/7 machine monitoring, supplying weekly reports and notifying you should preventive maintenance action be required.

Control your maintenance costs

Stay on track with planned servicing and keep your asset covered with our range of flexible maintenance and repair agreements.



Optimize site efficiency

Using Volvo Site Simulation, we can help you make on-site logistics more efficient and lower your cost per tonne. Get recommendations on the best fleet configuration and site set-up to maximize profitability.

24h parts delivery guarantee

Maintain productivity and machine uptime with our range of readily available parts, all backed by Volvo warranty – with 24-hour parts delivery guarantee. Only by using Genuine Volvo Parts, can you protect your investment, extend machine life and guarantee long lasting performance.

Lifetime Frame and Structure Warranty

Quality has long been a hallmark of the Volvo brand. Decades of experience, both in the field and in the laboratory, are today delivering unsurpassed frame and structure durability. We believe in the quality of our products – so much so that Volvo machines come with a Lifetime Frame and Structure Warranty, covering the frame, articulation joint.

Ref. No VOE22700009330/ English-22 / 2023.01 / ART / Volvo, Global Marketing

VOLVO